



## Instruction for OGL SATURN 60 LED globe replacement

P/N: CS110-W09-W, CS110-N09-W, CS110-C09-W

**Mains power switch in house's fuse box to be disconnected (switch to OFF position) before LED replacement globe installation**

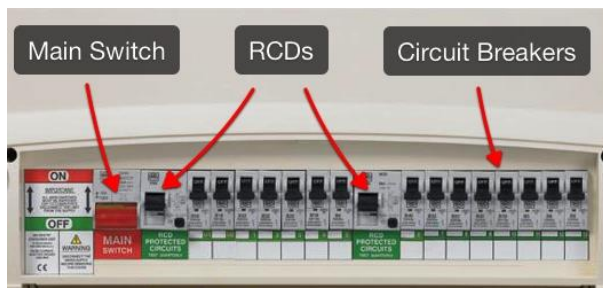

1. Pull down 25-30mm downlight's frame with fingers and then hold LED mounting springs to prevent damage to the plaster and remove downlight from the ceiling.

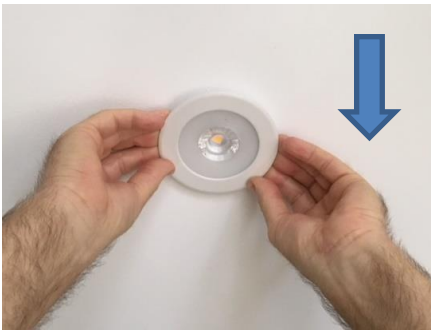

2. Release springs and pull down the globe until is visible the black rectangle connector



3. Disconnect the LED glob from LED driver (transformer) by pushing the tab on the side of the connector and then pull sideways to disengage connector.





4. Get a replacement globe and connect to LED driver connector.



Please make sure the connector's tab is latched – clicks and locks



5. Bend LED globe's fixing springs towards the globe and then insert springs into the mounting hole in a ceiling



6. Push LED glob firmly against ceiling



7. Switch ON mains power and then lighting switch to test if lamps works OK.
8. This was last step of the LED globe replacement